


MSS SP 44

FORGED FLANGE 600 LB



NPS	FLANGE			HUB		RAISED FACE	DRILLING TEMPLATE			RADIUS	
	A	C		D	E	F	G	H	I	J	R
	Overall Dia.	WNF Thickness	Blind F. Thickness	Overall Length WNF	Dia. at Weld Bevel	Hub Dia.	Face Dia.	Number of Holes	Bolt Hole Dia.	Dia of Circle Holes	
22"	869,35	95,25	95,25	196,85	558,80	666,75	641,35	24	47,75	777,75	11,18
26"	1016,0	107,95	125,48	222,25	660,4	747,78	749,30	28	50,80	914,40	12,70
28"	1073,2	111,25	131,83	234,95	711,2	803,15	800,10	28	53,85	965,20	12,70
30"	1130,3	114,30	139,70	247,65	762,0	862,08	857,25	28	53,85	1022,4	12,70
32"	1193,8	117,35	147,57	260,35	812,8	917,45	914,40	28	60,45	1079,5	12,70
34"	1244,6	120,65	153,92	269,75	863,6	973,07	965,2	28	60,45	1130,3	14,22
36"	1314,5	123,95	162,05	282,45	914,40	1031,75	1022,35	28	66,55	1193,0	14,22
38"	1270,0	152,40	155,45	254,00	965,20	1022,35	1054,10	28	60,45	1162,1	14,22
40"	1320,8	158,75	162,05	263,65	1016,0	1073,2	1111,3	32	60,45	1212,9	14,22
42"	1403,4	168,15	171,45	279,40	1066,8	1127,3	1168,4	28	66,55	1282,7	14,22
44"	1454,2	172,97	177,80	289,05	1117,6	1181,1	1225,6	32	66,55	1333,5	14,22
46"	1511,3	179,32	185,67	299,97	1168,4	1235,0	1276,4	32	66,55	1390,7	14,22
48"	1593,9	188,98	195,33	315,98	1219,2	1289,1	1333,5	32	73,15	1460,5	14,22

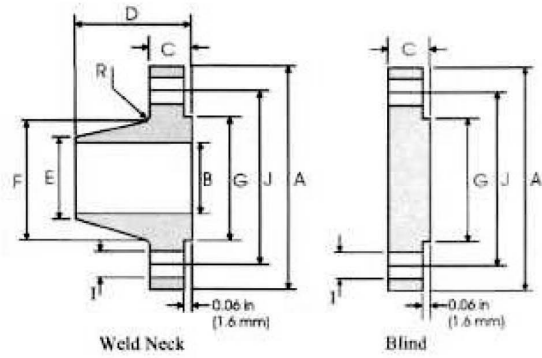